LED CYLINDER SURFACE LED CYLINDER




RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

IMPORTANT


1. Read all instructions.

- 2. Install in accordance with national and local electrical code regulations.
- 3. This product is intended to be installed and serviced by a qualified, licensed electrician.
- 4. Do not install in wet locations. For dry and damp use only.
- 5. Turn off electrical power before installing or servicing fixture in any way.
- 6. To reduce the risk of fire and overheating, make sure all connections are tight.
- 7. Under no circumstances can the lighting fixture be
- covered with heat insulation gasket or similar materials.


WIRING



STRUCTURE OF LAMP



When trim and engine are separated, attached together, and secure them with clockwise direction.

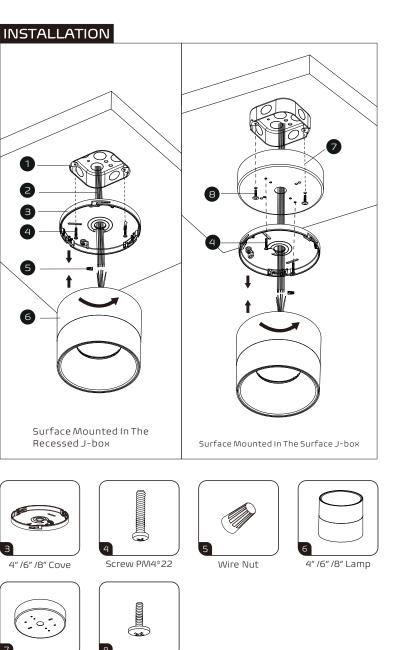

6″ Canopy Power Feed

▶ PARTS

Power Co	ord (By Oth	ers)	 	 	
4" /6" /8"	Cove		 	 	
Screw P/	N4*22		 	 	
Wire Nut	:		 	 	
4" /6" /8"	amp		 		
6″ Canop	y Power Fe	ed			

Screw CM4*12

LED CYLINDER PENDANT

LED CYLINDER INSTALLATION INSTRUCTIONS


RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

C-OB-V

Junction Box Crossbar


Power Cord

▶ 4" Pendant With Cable



▶ 6" And 8" Pendant With Cable

Recessed Jbox Surface Jbox










11



Power Feed







6″ Canopy Power Feed






▶ Pendant With Stem

Recessed Jbox

\$

Ð

1



10



5

10

Surface Jbox

Wire Nut

Junction Box Crossbar





Screw PM4*22

4" Stem Canopy Kits



Canopy Kits

0 10

Stem Kits

4"/6"/8" Lamp



Screw PM3*5

▶ PARTS

0	4" Octogon Junction Box (By Others)
2	Power Cord (By Others)
B	Wire Nut
4	Power Cord
6	Junction Box Crossbar
6	Screw PM4*22
7	Stem Kits
8	4" Stem Canopy Kits
9	6" Stem Canopy Kits
10	4"/6"/8" Lamp
1	Screw PM3*5

▶ PARTS

· ·	
1 4"	Octogon Junction Box (By Others)
2 Pc	ower Cord (By Others)
8 w	ire Nut
4 Ju	inction Box Crossbar
5 Sc	rew PM4*22
6 Pc	ower Cord
7 4"	Canopy Power Feed
B Ca	ble Clip
9 <u>Ca</u>	ble Holder
	rcraft Cable
1 6″	Canopy Power Feed
D 4″	/6" /8" Lamp

ATTENTION: Install in accordance with national and local building and electrical codes.

Page 2

All rights reserved. Due to continuous product improvements, specifications and dimensions are subject to change without notice.